


## LED ILLUMINATOR

**Patent number:** JP11163412  
**Publication date:** 1999-06-18  
**Inventor:** KAMATA SAKUO; KOYAMA SHOICHI; ASAHI NOBUYUKI; SUZUKI TOSHIYUKI; SHIOHAMA EIJI; SUGIMOTO MASARU; YAMAMOTO SHOHEI; HASHIZUME JIRO; AKIBA YASUSHI; TANAKA KOJI  
**Applicant:** MATSUSHITA ELECTRIC WORKS LTD  
**Classification:**  
 - International: H01L33/00  
 - European:  
**Application number:** JP19970322626 19971125  
**Priority number(s):**

### Abstract of JP11163412

**PROBLEM TO BE SOLVED:** To provide a LED illuminator which can easily obtain arbitrary luminous intensity distribution characteristic, while being formed thin.  
**SOLUTION:** A large number concavities 11 are arranged vertically and horizontally on one side of a rectangular plate-type molded interconnection device(MID) substrate 1, and three LED chips are implemented on the bottom of each concavity 11. Since a plurality of LED chips 1 are implemented in each of the concavity 11 and positioned three-dimensionally on MID substrate 10, arbitrary luminous intensity distribution characteristic can be easily obtained according to the shape of the substrate 10, while forming a module thin. If the plurality of the LED chips 1 are implemented, which have one or more different luminescent colors, preferably at least three colors of red, blue and green, delicate color differences such as white light of a fluorescent lamp and daylight can be realized in the light of the overall module by mixing the luminescent colors from each of LED chips 1.

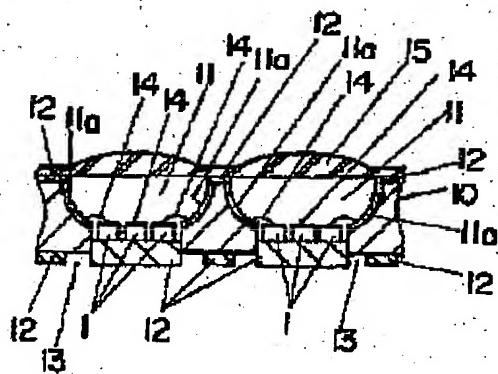

Data supplied from the esp@cenet database - Worldwide